


# Tri-Fix Rivet Bulbing Type

PURCHASE PARTNERS



The TriFix is used is a wide grip fastener capable of being used in applications where thicknesses vary or in large or irregular shape holes. Used in soft or brittle materials such as aluminum, plastic or acrylic, this fastener creates a wide loadbearing surface at the tail by flowering out into three equidistant legs, much like a moly bolt. Because the TriFix has multi grip properties, it can be used to reduce inventory of standard grip rivets.

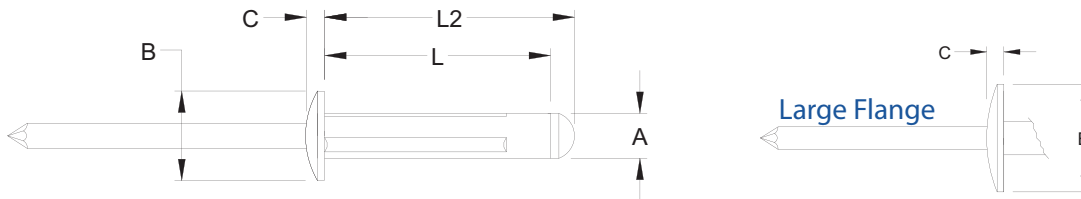



## Inch Standard

"A"	Part Number	Grip Range	"L"	"L2"	"B"	"C"
5/32"	ABL-0516	.040 - .118	.536	.630	.315	.055
	ABL-0523	.040 - .275	.740	.840		
	ABL-0530	.157 - .472	.964	1.07		
3/16"	ABL-0619	.040 - .157	.602	.720	.375	.063
	ABL-0625	.040 - .354	.807	.920		
	ABL-0630	.157 - 472	.964	1.070		
	ABL-0640	.157 - .625	1.100	1.200		
Large Flange	ABL-0523/LF12	.040 - .275	.840	.840	.472	.055
	ABL-0625/LF14	.040 - .354	.920	.920	.550	.063
Structural	See "Super Tri-Fix" specification sheet for details.					

### AVAILABLE FINISHES:

- Black Anodized
- Color Anodized
- White Painted
- Black Painted
- Almond Painted
- Pebblestone Painted
- Spray and Bake or Powder Coat Paints Available.

We can color match upon request.

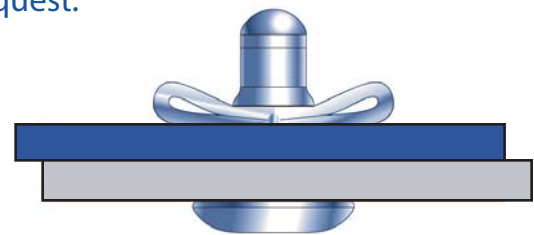

Material	Part# Prefix	5/32"		3/16"	
		600N	1000N	900N	1100N
ALL ALUMINUM TRI-FIX	ABL	600N	1000N	900N	1100N
ALL ALUMINUM SUPER TRI-FIX	ABLS	n/a	n/a	3260N	1900N
		Shear	Tension	Shear	Tension
TYPICAL PERFORMANCE					

Phone 314-567-8585