



# MultiGrip-RT Ring Type

PURCHASE PARTNERS

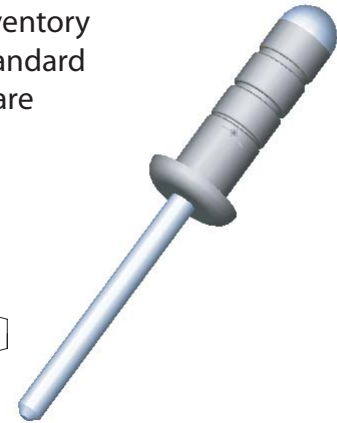

MultiGrips have a wider grip range than standard blind rivets allowing them to be used in a variable grip applications. MultiGrips are also a good catalyst in reducing inventory SKU's as one rivet could encompass the grip range of up to 3 different sizes of standard blind rivets. Ring Type MultiGrips are offered in Alu/Steel or Alu/Alu. Steel/Steel are offered in "Crimp Type" MultiGrips and Stainless/Stainless are offered under the product name RivInox2.

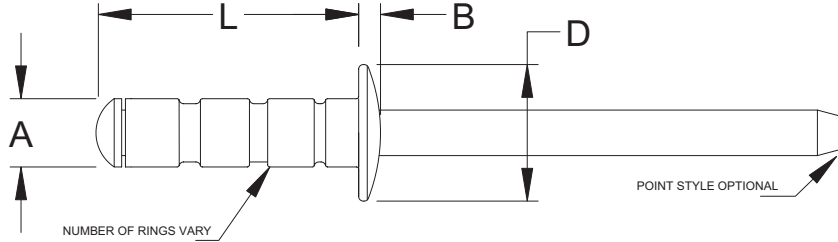

Other Head Styles Available Upon Request

Inch Standard

"A"	Part Number	Grip Range	Length	"D"	"B"	Hole Size
1/8"	ABS41-42MGRT	.020 - .125	.313	.250 +/-0.012	.043 +/-0.004	.134 .129
	ABS41-43MGRT	.039 - .187	.389			
	ABS43-44MGRT	.156 - .250	.500			
	ABS43-45MGRT	.196 - .330	.586			
	ABS45-47MGRT	.236 - .445	.704			
5/32"	ABS51-53MGRT	.032 - .157	.393	.312 +/-0.015	.051 +/-0.004	.165 .161
	ABS52-54MGRT	.047 - .276	.512			
	ABS53-55MGRT	.156 - .354	.590			
	ABS54-58MGRT	.276 - .472	.708			
3/16"	ABS62-64MGRT	.062 - .250	.519	.375 +/-0.015	.062 +/-0.004	.197 .193
	ABS63-67MGRT	.187 - .456	.716			
	ABS66-69MGRT	.275 - .598	.875			
	ABS66-610MGRT	.393 - .670	.952			
	ABS610-612MGRT	.500 - .787	1.07			

Also available in Large Flange

Material	Part# Prefix	1/8"		5/32"		3/16"	
Aluminum / Steel	ABS	540 N	780 N	880 N	1570 N	1470 N	2160 N
All Aluminum	ABA	Available Upon Request					
All Stainless	FBF	See "Rivinox2"					
		Shear	Tension	Shear	Tension	Shear	Tension
TYPICAL PERFORMANCE SPECIFICATIONS							